


FLATLITE® is inherently safe with just the standard indoor or outdoor laminate, but if it was punctured or cut, it would be electrically live. In a decorative architecture application, FLATLITE® requires a fixture (extrusion) for proper installation. There are as many ways to create a protective fixture for FLATLITE® as there is uses for the product itself.


Extrusions consists of 2 parts - a "base" and a "lens". The base of the extrusion is a simple 'U' channel, into which the FLATLITE® lamp is slid, and a protective lens is either snapped on or slid in.

Interior Extrusions

E-Lite Technologies makes available interior extrusions for lamp widths of 1/4, 1/2, 1, 3 & 6 inches.

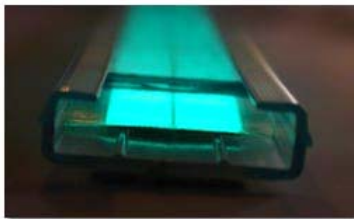

ADT-0050C-10

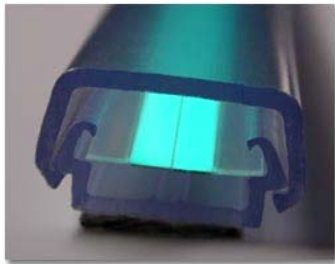


EDT-0025C-5

Lamp Strip Width	Extrusion SKU	Extrusion Consists of:
1/4"	EDT-0025C-5'	5' base 5' snap-over lens
1/2"	EDT-0075C-5'	5' base 5' snap-over lens
	ADT-0050C-10	8' base 8' slide-over lens
1"	ADT-0100C-10	8' base 8' slide-over lens
	ADL-0100C-8-SN	8' base 8' snap-over lens
3"	ADT-0300C-10	8' base 8' slide-over lens
6"	ADT-0600C-10	10' base 8' slide-over lens

¹used for egress applications. based on Wiremold® 400 and 800 series raceway. Limited stock of 0075 is available.

Interior Extrusion Details (for ADT Extrusions):

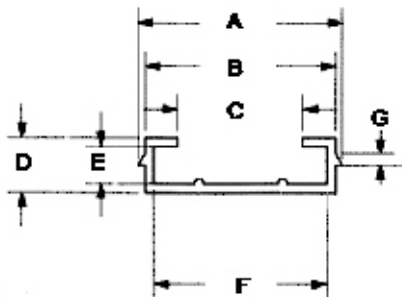

Dimensions	Unit	SKU			
		ADT-0050C-10	ADT-0100C-10	ADT-0300C-10	ADT-0600C-10
A	inches	0.915	1.415	3.455	6.534
	mm	23.24	35.94	87.76	165.95
B	inches	0.855	1.355	3.395	6.439
	mm	21.72	34.42	86.23	163.55
C	inches	0.562	1.125	3.125	5.919
	mm	14.29	28.57	79.38	150.34
D	inches	0.249	0.247	0.287	0.387
	mm	6.32	6.29	7.3	9.83
E	inches	0.167	0.167	0.167	0.167
	mm	4.25	4.25	4.25	4.25
F	inches	0.775	1.275	3.275	6.286
	mm	19.68	32.38	83.19	159.66
G	inches	0.05	0.05	0.05	0.05
	mm	1.27	1.27	1.27	1.27

www.E-Lite.com
Sales@E-Lite.com
 Phone 203.371.2070

Fax 203.371.2078
 2285 Reservoir Avenue
 Trumbull, CT 06611-4743



Exterior Extrusions

E-Lite Technologies makes available exterior extrusions only for lamp widths 2 inches. The following components are available:

AWT-0200C-8	2" Exterior Track (8 Foot Section)
AWS-0200C-S	2" Exterior Splice
AWM-0200S-4	2" Exterior Clip
AWE-0200C	2" Exterior End Cap

